



INSTALLATION INSTRUCTIONS

PART No. 30417, 30445 & 50417

MODEL No.

This instruction sheet is to help identify the driver side mirror from the passenger side mirror. The driver side mirror arm has a 45 degree bend in the tube. The driver mirror is viewed through the driver door window. The passenger side is bent in a 90 degree angle, this mirror is viewed through the passenger side windshield. This is how the mirrors should look when they have been installed.



INSTALLATION INSTRUCTIONS

PART No. 30417, 30445 & 50417

MODEL No.

This instruction sheet is to help identify the driver side mirror from the passenger side mirror. The driver side mirror arm has a 45 degree bend in the tube. The driver mirror is viewed through the driver door window. The passenger side is bent in a 90 degree angle, this mirror is viewed through the passenger side windshield. This is how the mirrors should look when they have been installed.

PASSENGER
SIDE



DRIVER
SIDE

PASSENGER
SIDE



DRIVER
SIDE



INSTALLATION INSTRUCTIONS

PART No. 30445


MODEL No.

Wrangler Mirror Kit

NOTE 1: The factory bolts have been fastened with Locktite and could be difficult to remove. You may need to use a hand held impact driver and hammer to free them. Be careful not to strip the Torx Head.

NOTE 2: Check to make sure you have the correct mirror arms and brackets on the proper sides of the vehicle. Place bracket assemblies in place and check alignment of holes.

NOTE 3: Before installing new bolts provided with this kit, coat threads with a silicon sealer to prevent water from leaking into the vehicle and fasten securely in place.

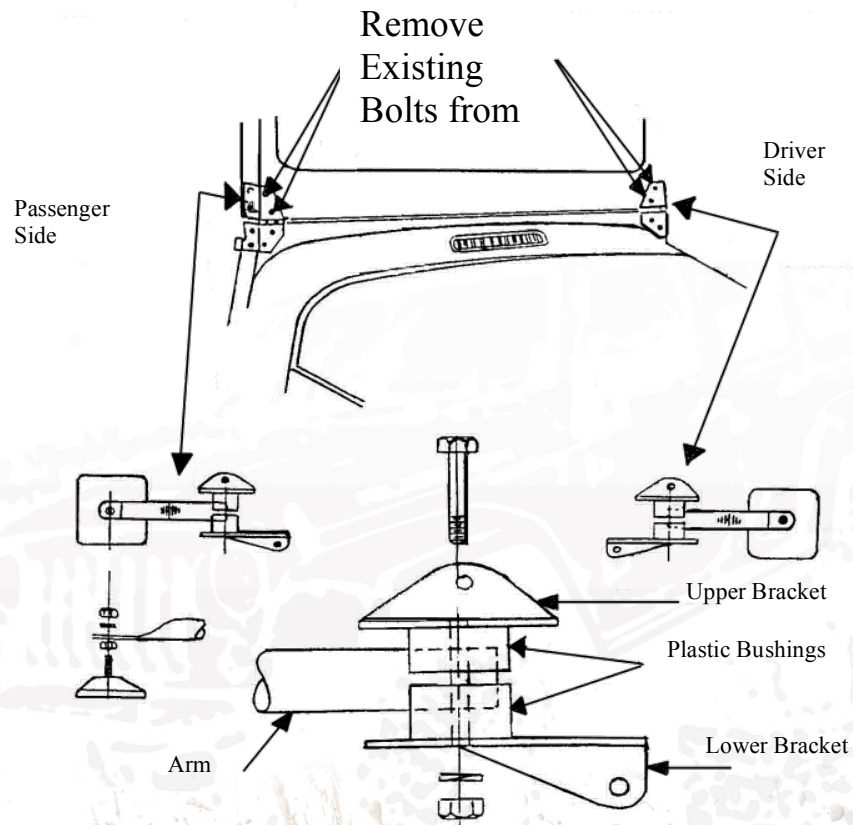

INSTALLATION INSTRUCTIONS

PART No. 30445

MODEL No.

Wrangler Mirror Kit

NOTE 1: The factory bolts have been fastened with Locktite and could be difficult to remove. You may need to use a hand held impact driver and hammer to free them. Be careful not to strip the Torx Head.

NOTE 2: Check to make sure you have the correct mirror arms and brackets on the proper sides of the vehicle. Place bracket assemblies in place and check alignment of holes.

NOTE 3: Before installing new bolts provided with this kit, coat threads with a silicon sealer to prevent water from leaking into the vehicle and fasten securely in place.

