




INSTALLATION INSTRUCTIONS

PART No. 30509

MODEL No.

Tow Hook

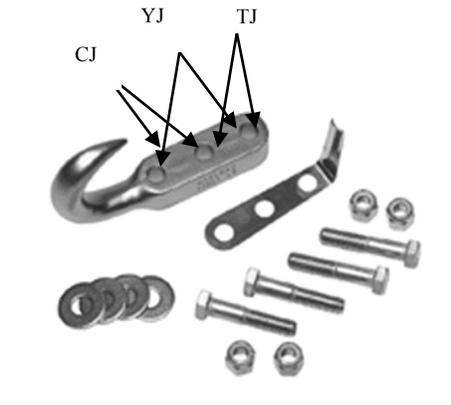

JEEP CJ Mounting tow hook on the front: Attach the tow hook using the two bolt holes closest to the curved end of the hook. The front hole of the tow hook will mount in the existing bumper hole and the second hole is located under the frame cover. It will be necessary to drill a hole in the frame cover, to attach the second bolt. Use the two fine thread hex bolts to fasten the tow hook and torque these to 60 ft/lbs.

JEEP YJ Mounting tow hook on the front: Attach the tow hook using the two bolt holes on the ends of the tow hook (the center hole will not be used). The front hole of the tow hook will mount in the existing bumper bolt hole and the second hole is located under the frame cover. It will be necessary to drill a hole in the frame cover to attach the second bolt. Use the two course thread hex bolts to fasten the tow hook and torque to 60 ft/lbs.

JEEP TJ Mounting tow hook on the front: Attach the tow hook using the two bolt holes at the end of the hook. Remove the two bumper bolts and attach the tow hook using the two course thread hex bolts, torque the bolts to 60 ft/lbs.

REAR MOUNTING: Locate any suitable flat surface on the frame, position and mark the bolt mounting holes from the hook on the frame. Drill the frame using an 1/2" drill. Use the two fine thread hex bolts to fasten the tow hooks and torque to 60 ft/lbs.




INSTALLATION INSTRUCTIONS

PART No. 30509

MODEL No.

Tow Hook

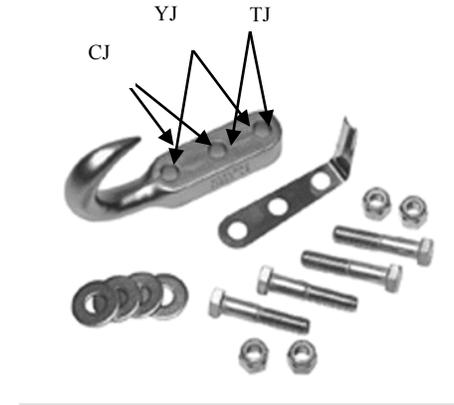

JEEP CJ Mounting tow hook on the front: Attach the tow hook using the two bolt holes closest to the curved end of the hook. The front hole of the tow hook will mount in the existing bumper hole and the second hole is located under the frame cover. It will be necessary to drill a hole in the frame cover, to attach the second bolt. Use the two fine thread hex bolts to fasten the tow hook and torque these to 60 ft/lbs.

JEEP YJ Mounting tow hook on the front: Attach the tow hook using the two bolt holes on the ends of the tow hook (the center hole will not be used). The front hole of the tow hook will mount in the existing bumper bolt hole and the second hole is located under the frame cover. It will be necessary to drill a hole in the frame cover to attach the second bolt. Use the two course thread hex bolts to fasten the tow hook and torque to 60 ft/lbs.

JEEP TJ Mounting tow hook on the front: Attach the tow hook using the two bolt holes at the end of the hook. Remove the two bumper bolts and attach the tow hook using the two course thread hex bolts, torque the bolts to 60 ft/lbs.

REAR MOUNTING: Locate any suitable flat surface on the frame, position and mark the bolt mounting holes from the hook on the frame. Drill the frame using an 1/2" drill. Use the two fine thread hex bolts to fasten the tow hooks and torque to 60 ft/lbs.